

FILM BUSTER™

BASEBOARD STRIPPER

TM

DATA TECH SHEET

PRODUCT DESCRIPTION:

FILM BUSTER™ Baseboard Stripper is a cleaner and wax remover. A concentrated heavy duty formulation designed to remove floor finish, wax and soil buildup from baseboards, floors, edges, corners and other difficult to reach areas. Use on vinyl, vinyl composition, asbestos, terrazzo, ceramic and quarry tile floors. For other surfaces always pretest in an inconspicuous area.

FEATURES:

Labor Saving:

Clinging action reduces the labor that is involved with stripping finish buildup and soil on hard to maintain areas such as baseboards, corners, stairwells, poles and beams.

User Friendly:

Ready-to-use aerosol package simplifies application. Nothing to dilute.

Special Hint:

Apply just before stripping or cleaning the general area.

PRODUCT SPECIFICATIONS:

pH	13.6 ± 0.3
Color	Light Brown
Fragrance	Solvent
Physical State	Liquid Under Pressure
Freezing Point	32°F
Solubility In Water	Complete
Warehouse Storage	(NFPA) Level 1 Aerosol
Flash Point	110°F

INGREDIENTS:

Water	7732-18-5
Potassium Hydroxide	1310-58-3
Diisopropanolamine	110-97-4
Isopropyl Alcohol	67-63-0
Isobutane	75-28-5
Sodium Metasilicate	6834-92-0

DILUTIONS	HEALTH	FLAMMABILITY	REACTIVITY
CONCENTRATE	NFPA 3 HMIS	NFPA 2 HMIS	NFPA 0 HMIS
CONCENTRAR			
PROPORCIÓN	SALUD	INFLAMABILIDAD	REACTIVIDAD

0	1	2	3	4
Minimal	Slight	Moderate	Serious	Severe
Mínimo	Mínimo	Moderar	Grave	Drastico

ECOLOGICAL INFORMATION:


- Recyclable Steel Can (Where Available)
- VOC Compliant
- Contains No CFC's

FILM BUSTER™ BASEBOARD STRIPPER

DIRECTIONS

USE INFORMATION

For use on baseboards, vinyl composition tile, asbestos tile, terrazzo, ceramic or quarry tile. Do not use on painted surfaces or carpet. Pretest on an inconspicuous area for other surfaces.

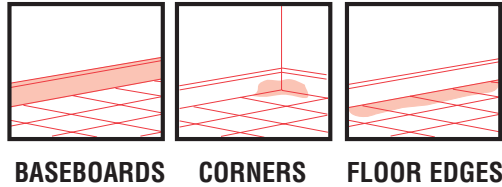

DIRECTIONS FOR USE:

1. **SHAKE** can well.
2. **SPRAY** the baseboard while holding the can in an inverted position 6" to 8" from the surface.
3. **WAIT** 5 minutes.
4. **SCRUB** the treated surface with an abrasive pad or brush.
5. **RINSE** the surface clean with water.

FIRST AID:

If in eyes or on skin, immediately flush with plenty of water for 15 minutes while removing contaminated clothing and shoes. Get medical attention. **If inhaled**, remove to fresh air. Get medical attention. **If ingested**, get medical attention. NEVER GIVE ANYTHING BY MOUTH TO AN UNCONSCIOUS PERSON.

HANDLING AND STORAGE:

SUGGESTED STORAGE TEMPERATURE: Store inside at 40-90°F. **SPECIAL HANDLING AND STORAGE:** Handle in accordance with good industrial hygiene and safety practices. These practices include avoiding unnecessary exposure and removal of material from eyes, skin and clothing. Store in a cool, dry, ventilated area. Protect from freezing. **KEEP OUT OF REACH OF CHILDREN.**

PERSONAL PROTECTION:

Respiratory Protection: Not needed in normal use.
Ventilation: Use with adequate ventilation.
Eye Protection: Safety glasses are required.
Protective Gloves: Protective gloves are required.
Other Protective Clothing or Equipment: Wear clothing as necessary to prevent skin contact.



TRANSPORTATION INFORMATION:

U.S. DOT - Proper Shipping Name: Consumer Commodity ORM-D
Marine Pollutant: No.

MSDS FAX RETRIEVAL
Read MSDS before using this product
800-551-0101
OBTENCIÓN DE HDSM POR FAX
Leer la HDSM antes de utilizar este producto

FOR CHEMICAL EMERGENCY
SPILL, LEAK, FIRE, EXPOSURE OR ACCIDENT
CALL CHEMTREC DAY OR NIGHT
800-424-9300
PARA EMERGENCIAS QUÍMICA DERRAMES,
ESCAPES, FUEGO, EXPOSICIÓN O ACCIDENTE
LLAMAR DE DÍA O DE NOCHE A CHEMTREC

TECH HOTLINE
800-810-4829
LINEA DE TÉCNICA